




12"x12" Incandescent Look LED Pedestrian Signal

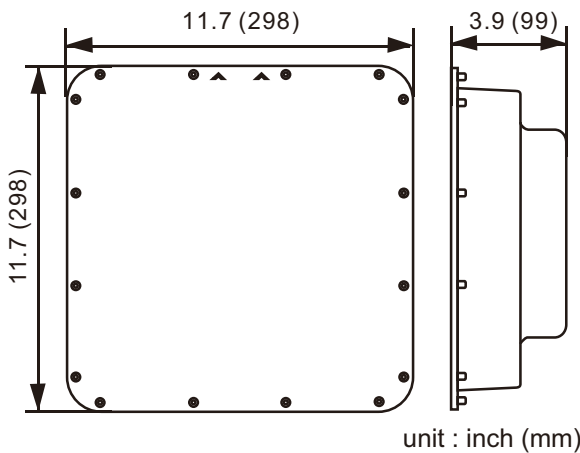

Features / Benefits

- Meets the latest PTCI ITE, Caltrans Specifications and the 2003 MUTCD
- High efficiency & long life LED light source
- Failure of a single LED in the Hand and Man icons results in loss of light from that LED only
- Easy to install with existing signal enclosure
- Portland Orange for Hand and Lunar White for Man

Specifications

- Operating Voltage Range : 80 VAC to 135VAC (120VAC nominal)
- Operating Temperature Range : - 40 °C to +74 °C
- Power Factor > 0.9
- Total Harmonic Distortion < 20%
- Meets FCC Title 47, Subpart B, Section 15 regulations for electrical noise
- Conforms to MIL-STD-810F for rain and blowing rain
- Conforms to MIL-STD-883, Test Method 1010, for temperature cycling requirements
- Conforms to MIL-STD-883, Test Method 2007, for mechanical vibration

Model Number	Color	Description	Dimension	Power Consumption (Watt) (Typ.)			Symbol			Meet spec	
				Hand	Person	Conutdown	Hand	Person	Conutdown	ITE	Caltrans
TRP-O30D31M2	Portland Orange	Hand	12" x 12"	7	-	-	Full	-	-	✓	✓
TRP-W30D32A2	White	Walking Person	12" x 12"	-	7	-	-	Full	-	✓	✓
TRP-O30D32E2	Portland Orange	Countdown	12" x 12"	-	-	7	-	-	Full	✓	✓
TRP-C30D32F2	Portland Orange / White	Overlay	12" x 12"	7	7	-	Full	Full	-	✓	✓



Address

1663 West 2nd Street, Pomona, CA 91766, U.S.A.
 Tel : 909-784-3333 Fax : 909-784-3330
 E-mail : Sales@eoius.com http : //www.eoius.com

