



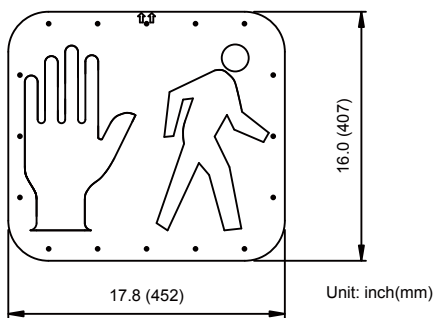

# 16" x 18" Incandescent Look LED Pedestrian Signal

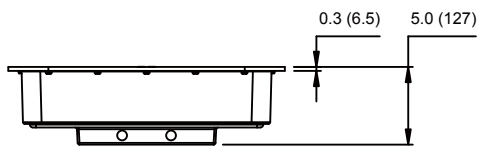

## Features / Benefits

- Meets the March 2004 PTCI ITE, Caltrans Specifications and the 2003 MUTCD.
- High efficiency & long life LED light source.
- Failure of a single LED in the Hand and Man icons results in loss of light from that LED only.
- Easy to install with existing signal enclosure.
- Portland Orange for Hand and Lunar White for Man.

## Specifications

- Operating Voltage Range: 80 VAC to 135VAC (120VAC nominal).
- Operating Temperature Range: -40°C to +74°C.
- Power Factor > 0.9
- Total Harmonic Distortion < 20%.
- Meets FCC Title 47, Subpart B, Section 15 regulations for electrical noise.
- Conforms to MIL-STD-810F for rain and blowing rain.
- Conforms to MIL-STD-883, Test Method 1010, for temperature cycling requirements.
- Conforms to MIL-STD-883, Test Method 2007, for mechanical vibration.

Model Number	Color	Description	Dimension	Power Consumption Typical(Watt)		Hand	Person	Meet spec	
				Hand	Person	Symbol	Symbol	Caltrans	ITE
TRP-C45DG-W2	Portland Orange/White	Combination Hand and Walking Person	16" x 18"	7.2	7.2	Full	Full	✓	✓

**Address**