

# Edco LCDP Series


Data Circuit Protection

■ Surge Protection  
For *Business-Critical Continuity™*

The Edco LCDP Series is designed to conveniently protect 8 wire, low voltage data circuits and employs two RJ-45 jacks for easy installation. The Edco LCDP utilizes silicon avalanche (solid-state) suppression technology, and exhibits very low capacitance to accommodate high data rates. This unit supports high-speed data rates of over 100 Mbps.

## General Technical Specifications

Operating Voltage	5, 12, 24, 48, 65 VDC
Clamping Voltage	8, 15, 30, 60, 75 VDC
Operating Current	1.5 A
Peak Surge Current (10 x 1000 μs)	008 = 125 A, 015 = 72 A, 030 = 22 A, 060 = 18 A, POE* = 15 A
Frequency Range	0–100 MHz
Insertion Loss	< 0.1 dB at 50 MHz
SPD Technology	Silicon Avalanche Diode (SAD)
Connection Type	RJ-45 Jacks
Operating Temperature	-40°C to +85°C
Dimensions (Inches)	1.0H x 2.5W x 4.25L
Weight	3 oz
Certifications	UL 497B (*except LCDP-POE)
Warranty	5 years

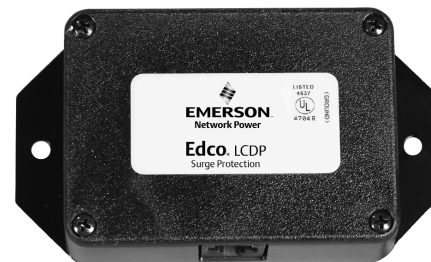

## Features

- <1 nanosecond response time
- Line-to-line protection
- Low capacitance
- RJ-45/4 pair protection (8 wire)
- Silicon avalanche design
- Line to ground protection
- 5 year warranty



## Installation

The user equipment plugs into the LCDP's equipment (protected) side, and the LCDP's line (unprotected) side is connected to the incoming line. All 8 conductors are protected. The green ground wire must be bonded to the protected equipment power ground (third wire, green wire safety ground). Do not add length to the ground wire, for it must be kept as short as possible.

## Ordering Information

LCDP-008	8 Volts
LCDP-015	15 Volts
LCDP-030	30 Volts
LCDP-060	60 Volts
LCDP-POE	75 Volts

**Emerson Network Power.**  
The global leader in enabling  
*Business-Critical Continuity™*.

- AC Power
- Embedded Computing
- Outside Plant
- Racks and Integrated Cabinets
- Connectivity
- Embedded Power
- Power Switching & Control
- Services
- DC Power
- Monitoring
- Precision Cooling
- Surge Protection

### Emerson Network Power Contact information

#### Headquarters

Surge Protection  
328 Water Street  
Binghamton, NY 13901  
T: (607) 721-8840  
T: (800) 288-6169  
F: (607) 722-8713  
E: [contactsurge@emerson.com](mailto:contactsurge@emerson.com)

650 SW 27th Avenue  
Ocala, FL 34471  
T: (352) 732-3029  
T: (800) 648-4076  
F: (352) 867-1237

[www.emersonnetworkpower.com](http://www.emersonnetworkpower.com)

